


FEATURES:



- Capacity: 50kg to 500kg
- Compact structure, easy installation
- OIML C4 Approval

APPLICATION:

- Platform scales

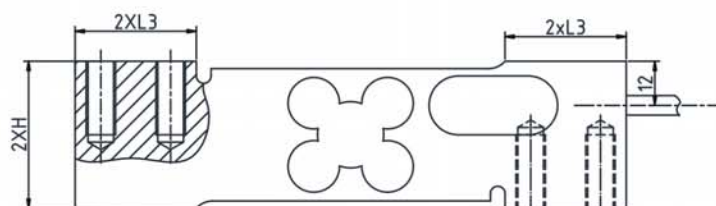

Wiring Diagram

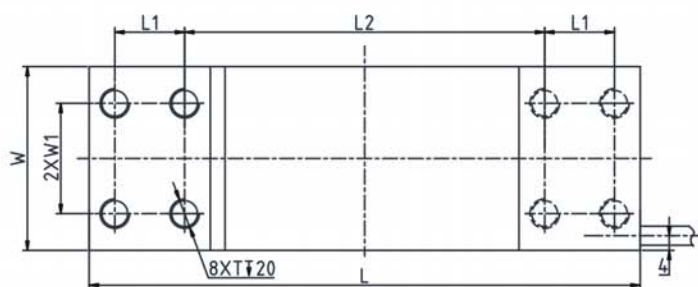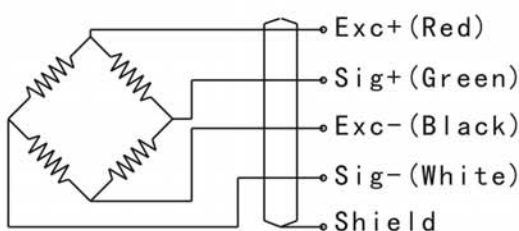

Rated Capacity:	L	L1	L2	L3	H	W	W1	T
50,100,150,200, 250,300,500kg	150	19	98	33	40	50	30	M8

SPECIFICATIONS

Rated capacity:	50kg to 500kg
Sensitivity:	2.0 ± 0.2mv/v
Accuracy Class:	OIML C4
Repeatability:	± 0.01% F.S
Non-linearity:	± 0.0166% F.S
Hysteresis error:	± 0.0166% F.S
Zero balance:	± 3% Emax
Creep error(30minutes):	± 0.0166% F.S
Temperature effect on zero:	± 0.0175% F.S/10°C
Temperature effect on output:	+20°C~+40°C, ± 0.0175% F.S/10°C -10°C~+20°C, ± 0.0117% F.S/10°C
Compensated temperature range:	-10°C~+40°C
Operating temperature range:	-10°C~+50°C

Maximum safe overload:	150% Emax
Ultimate overload:	300% Emax
Recommended Excitation:	10V DC
Maximum Excitation:	15V DC
Protection Class:	IP65
Input impedance:	404 ± 15 Ω
Output impedance:	350 ± 3 Ω
Insulation resistance at 50V DC:	≥ 2000M Ω
Material:	Aluminium
cable length:	1.8meter, diameter Φ5mm
Max.platform size:	400 × 500mm
Recommended Installation torque:	25N.m