

FEATURES:

- Capacity: 10kg to 100kg
- Compact design,easy to install
- Certificate of OIML C3





APPLICATION:

- Pricing scales, counting scales, Barcode scale etc.



Wiring Diagram

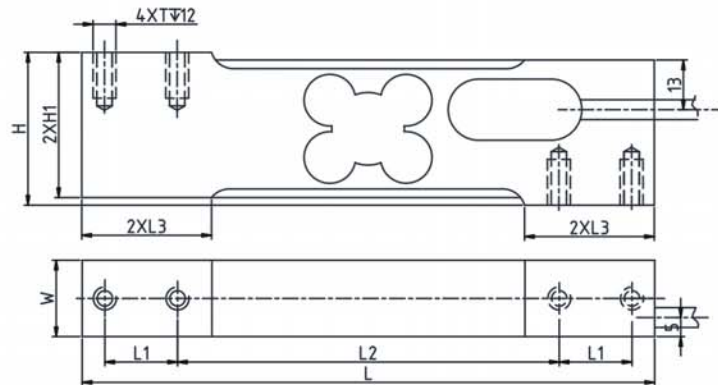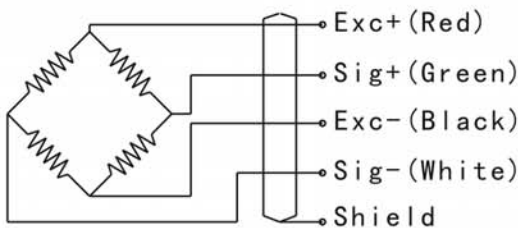

Rated Capacity:	L	L1	L2	L3	H	H1	W	T
10,15,20,30kg	150	19.05	100	34	40	38	20	M6
50,75,100kg	150	19.05	100	34	40	38	25	M6

SPECIFICATIONS

Rated capacity:	10kg to 100kg	Maximum safe overload:	150%Emax
Rated output:	2.0 ± 0.2mv/v	Ultimate safe overload:	300%Emax
Combined error:	OIML C3	Recommended Excitation:	10V DC
Non-repeatability:	± 0.01% F.S	Maximum Excitation:	15V DC
Non-linearity:	± 0.0166% F.S	Environment protection:	IP65
Hysteresis error:	± 0.0166% F.S	Input impedance:	404 ± 15 Ω
Zero balance:	± 3%Emax	Output impedance:	350 ± 3 Ω
Creep error(30minutes):	± 0.0166% F.S	Insulation resistance at 50V DC:	≥ 2000M Ω
Temperature effect on zero:	± 0.0175%F.S/10°C	Material:	Aluminium
Temperature effect on output:	+20°C~+40°C, ± 0.0175%F.S/10°C -10°C~+20°C, ± 0.0117%F.S/10°C	Cable length:	1.8meter, diameter Φ 5mm
Compensated temperature range:	-10°C~+40°C	Max.platform size:	300 × 400mm
Operating temperature range:	-10°C~+50°C	Installation torque,recommended:	10N.m