

DFWATEX3GD DFW "ATEX3GD": WEIGHT INDICATOR FOR ATEX 2 & 22 ZONES



Weight indicator for areas classified as hazardous with protection methods according to:
ATEX II 3G Ex nR IIC T6 Gc X for gases
ATEX II 3D Ex tc IIIC T130°C Dc IP68 X for dust.
Ideal for creating weighing systems, batching, and automation systems. CE-M approvable (OIML R-76 / EN 45501).



MAIN FEATURES

- Waterproof 17-key functional keypad.
- Backlit LCD display with 6 25-mm high contrast digits and with indication of active functions.
- Satined IP 68 stainless steel case.
- Suitable for use on the table, or wall.
- Dimensions: 264x174x115mm.
- Up to 10.000e or multirange 3 x 3000e @ 0,3 μ V/d in CE-M approved version for legal for trade use.
- Up to 1.000.000 displayable divisions for internal factory use.
- Up to 8 signal linearization points with DINITOOLS (3 from keypad).
- Internal resolution up to 3.000.000 points.
- A/D 24-bit sigma-delta conversion, up to 200 conv./sec. autoselect.
- Board protection case inside the box.
- Digital calibration and set-up from keyboard.
- Instrument management & configuration from PC with DINITOOLS.
- 4 channels (for single weighing system).
- Power supply:
 - DFWATEX3GD: through 110-240Vac internal power adapter;
 - DFWATEX3GDB: through optional external battery (BP6ESTATEX3GD code), rechargeable in safe area. Battery charger not included.
- Connection with up to 8 load cells with 350 Ohm input resistance.

MAIN CERTIFICATIONS

- EC Type Approval (EN45501)
- OIML R76

I/O SECTION

- RS232/C port configurable for connection to printer/labeller in safe zone.
- RS232/C (or optionally RS485) bi-directional port configurable for PC, PLC, additional remote display, in safe zone.

FUNCTIONS

- **KEYBOARD:**
Zeroing, Automatic tare, Presetable tare, printing and/or data transmission, selectable function command, on/off switching, database of 10 tares, 2 Numeric IDs, keyboard lock, repetition of last printout made.
- **SELECTABLE FUNCTIONS:**
 - High Resolution Weighing x 10.
 - Net/Gross or lb/kg conversion.
 - Accumulation.
 - Formula weighing.
 - +/- Checkweighing.
 - Percentage weighing.
 - Approved transmission of the weight to PC/PLC (with Alibi memory ALMEM option).
 - Counting(Max. resolution of 1.500.000 divisions).
 - In/Out Truck weighing.
 - Hold.
 - Set Point Control (with DFIO option).



www.diniargeo.com



“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI AR GEO
FRANCE sarl
Nogent-sur-Marne
info.fr@diniargeo.com

DINI AR GEO
GMBH
Sinsheim - Germany
info.de@diniargeo.com

DINI AR GEO
UK Ltd
Taunton - United Kingdom
info.uk@diniargeo.com

DINI AR GEO WEIGHING
INSTRUMENTS Ltd
Shanghai - China
info.cn@diniargeo.com

DINI AR GEO
WEIGHBRIDGES
Calto (RO) – Italy
info@diniargeo.com




HEAD OFFICE

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena - Italy
Tel. +39.0536 843418 Fax. +39.0536 843521
info@diniargeo.com

SERVICE ASSISTANCE

Via Dell'Elettronica, 15
41042 Spezzano di Fiorano Modena - Italy
Tel. +39.0536 921784 Fax. +39.0536 926654
service@diniargeo.com

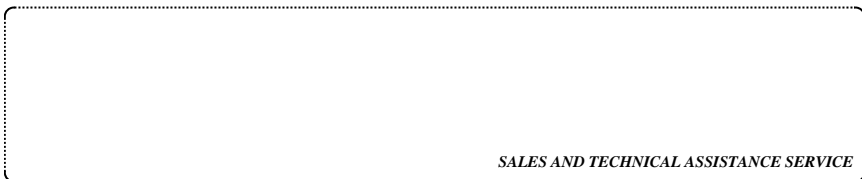

SALES AND TECHNICAL ASSISTANCE SERVICE

All the specifications and images can be subject to variations and upgrades without prior notice.